




LYNGSOE PEOPLE COUNTER CAMERA™

VISITOR COUNTER

Lyngsoe Systems visitor calculator is based on camera technology that offers exceptional accuracy for monitoring the number of visitors in the library. The 3D stereo technology can detect the direction of passage, differentiate between visitors in groups, and is not disturbed by fluctuations in light or shadows from either inside or outside of the library.

The visitor counter is part of the central management system where the number of visitors is stored in the MS SQL database. This feature enables easy-to-use and resourceful reporting tools for creating useful reports on visitor numbers and statistics. The reports can be created for each service operation or all service operations over a selectable period.

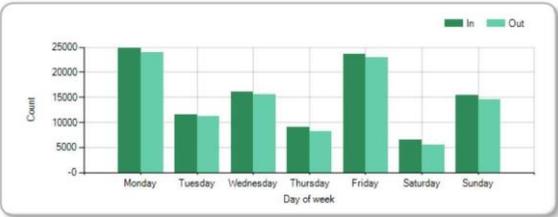

LIMITATION OF CUSTOMER VOLUME

The camera can also be used to keep track of how many patrons are visiting the library and it is possible to add a visitor limit feature to the counter.

This feature makes it possible for staff as well as patrons to see real-time information about the current number of visitors in the library. By using multiple cameras, the library can be divided into different sections which allows for tracking and limiting in different spaces, for example, the children's area or just the magazine hall.

Library is open

Customers

54

Max customer count

100



SPECIFICATIONS

LYNGSOE PEOPLE COUNTER CAMERA™

GENERAL

Detection based on camera technology
Java free interface

COMPATIBILITY AND SOFTWARE

Camera-operating system	Linux
Software	Lyngsoe Gate Controller
Database	Microsoft SQL
Encryption	HTTPS
Reports and statistics	Lyngsoe Reporter Lyngsoe Central Management
Customer limit	FLIR Occupancy Management feature (license required)

SPECIFICATIONS

PowerPoE Class 2, max 6W	
Operating temperature	0 °C - 45 °C / 32 °F - 113 °F
Encryption	HTTPS
External dimensions:	59 x 162 x 40.5 mm / 2.33 x 6.4 x 1.6"
Weight	250 g / 8.8 oz
Colour	White
Certificates	CE

